

Japanese technology since 1948



**NEW  
PRODUCT  
CATALOGUE  
2020-21**

# Drill D10VSTA

**ECONOMY**



## Specifications

Drill D10VSTA		Unit	
Drill Chuck	-		10 mm keyed
Capacity	Steel	mm	10
	Wood	mm	20
Power input	w		450
No Load Speed	/min		0-3000
Switch Type	Reverse		Provided
	Variable		Provided
Housing Structure	-		Clam Shell
Soft Grip handle	-		Provided
Dimension ( L*W*H)	-		(245*64*192) mm
Package	-		Carton
Standard Accessories	Chuck Key	Yes	
Weight	KG		1.3

# Impact Drill DV10VST

**ECONOMY**



**Impact Drill Tool Kit DV10VST**

**28 piece Accessory kit**  
for various applications

## Specifications

Tool Kit DV10VST		Unit	
Drill Chuck	-		10 mm keyed
Capacity(Concrete)	mm		10
Power input	w		550
No Load Speed	/min		0-3000
Switch Type	Reverse	Yes	
	Variable	Yes	
Housing Structure	-		Clam Shell
Soft Grip handle	-		Yes
Dimension ( L*W*H)	-		(290*66*200) mm
Package	-		BMC
Standard Accessories	Side handle	Yes	
	Depth Gauge	Yes	
	Accessory Kit	Yes	
Weight	KG		1.7

# Blower RB30VST

**ECONOMY**



### Specifications

Blower RB30VST		Unit	
Air Volume	(w/o nozzle)	m <sup>3</sup> /min	0-3.4
	Measured*1		3.4
Air Velocity	(with nozzle)	m/s	89
	Measured*1		89
Power Input		w	550
No-Load Speed		/min	0-16000
Variable Speed		Trigger and Dial	Yes
Dimension (L x W x H) *with nozzle		mm	490 x 184 x 182
Standard Accessories		Dust Bag	No
		Nozzle	Yes
Weight		KG	1.7

\*1. Actual measurement value. For reference purposes only. This value will vary depending on air condition.

# Trimmer M6ST

**ECONOMY**



**Faster Cutting Speed**



**Fine bit depth adjustment**

### Specifications

Trimmer M6ST		Unit	
Collet Capacity		mm	6.35
Power input		w	505
No Load Speed		/min	32000
Bit Depth Adjustment		-	With Rack
Dimension (L x W x H)		mm	90 x 82 x 207
Weight		KG	1.5
Package		-	Carton
Standard Accessories	Trimmer Guide		Yes
	Straight Guide		No
	Template Guide		No
	Others		Wrench(2pcs)

# Rotary Hammer DH22PBS

## ECONOMY



SDS-Plus Shank

Variable speed trigger

Soft grip for easier handling

Drilling / Hammer drilling

### Specifications

Rotary Hammer DH22PBS		Unit	
Capacity	Concrete	mm	22
	Steel	mm	13
	Wood	mm	25
Mode	-	-	2
Power input	W		620
Impact Energy	J		2.2
No-load rpm	/min		0-1100
Full-load bpm	/min		4400
Standard Accessories	Blow Mold Case	-	Yes
	Side Handle	-	Yes
	Depth Gauge	-	Yes
Overall Length	mm		365
Weight	KG		2.8

# Cut Off Machine - CC14STA

## ECONOMY

Quick-lock vise for fast, precise clamping of materials

Lightweight\* design with a powerful motor

Spindle lock for fast and easy wheel changes



### Specifications

Cut Off Machine - CC14STA		Unit	
Power input	w		2000
Cut Off Wheel Dia	mm		355
Handle Type	-		Bar
No Load Speed	-		3800
Dimension ( L*W*H)	-		(584*287*597)mm
Standard Accessories	Cut off Wheel & Wrench		Yes
Weight	KG		14.1



### Specifications

Chipping Hammer Hex Shank 5 Kg - H41SST		Unit
Shank	-	Hex
Impact energy : EPTA	J	7.2
Power input	w	1010
Full Load Impact Rate	/min	2900
Anti-Vibration Handle	-	Yes
Soft Grip handle	-	Yes
Dimension ( L*W*H)	-	(484*96*242)mm
Package	-	BMC
Standard Accessories	Blow Mold Case	Yes
	Bull Point	Yes
	Flat Chisel	Yes
	Side handle	Yes
	Hex Wrench	Yes
	Grease Tube	Yes
Weight	KG	5.3

# Diamond Blade - 402992 & 402993



### Features

- Great cost performance
- Suitable for cutting Marble, Granite, Clay brick, sandstone (medium)
- Provide faster cutting speed

### Specifications

Diamond Blade	402992	402993
Diameter (mm)	110	105
Shape	8 Segment	RIM
Diamond Height (mm)	10	7
Arbor Hole/Washer (mm)	20/16	20/16
Thickness (mm)	1.8	2
Applicable Machine	For Marble Cutters	For Marble Cutters
Package – Individual	Paper card	Paper card
Inner package box	10 Nos	10 Nos

## New Economy Blue Value Range - 1mm Cut-off wheel



### Features

- High safety & Consistency in performance with Low Vibration
- Fine cutting with less burnt mark and Burr.
- Suitable for MS & Stainless steel Application
- New Super thin with 50pcs Container
- New wheel of 107 mm increases the cutting life of wheel upto 7% \* compared to other wheels

BLUE VALUE

### Specifications

4.2" Cut Off Wheel - 796245	
Diameter (mm)	107
Arbor Hole (mm)	16
Thickness (mm)	1.0
Shape	Flat Center
Specification	WA46R-BF
Inner Package	50 pcs/Container



# New 14" Cut Off Wheels

## New Economy Range - 14" cut-off wheel - 796190



### Features

- Suitable for Cutting mild steel rods, pipes, channels & TMT bars et.
- Causes less material loss, burnt mark, less burr with better finish

### Specifications

New Economy Range -	796190
Diameter (mm)	355
Arbor Hole (mm)	25.4
Thickness (mm)	3
Shape	Flat Center
Specification	A30QBF
Inner Package	25pcs/pack



## 14" New - Blue value Wheel – 796243

*BLUE VALUE*



### New Economy "Blue Value series" Wheel with 3mm Thickness

#### Features

- New 14" Economy range Value series wheel with 3mm Thickness
- Suitable for cutting Metal, Stainless Steel, angle, pipes, channels & TMT bars cutting, etc.
- High Cut Rates & provides faster cutting speed
- Easy for Distribution: Packed Inside with 5 nos Shrink Packing, Easy handling for Hardware shop distribution

#### Specifications

### 14" Cut Off Wheel - 796243

Diameter (mm)	355	Thickness (mm)	3	Specification	A30R-BF
Arbor Hole (mm)	25.4	Shape	Flat Center	Inner Package	25pcs/pack

# GRINDING WHEEL - 796246



## New 4" Grinding Wheel - Blue Value Series - 796246

#### Features

- Long Life
- Competitive Pricing



#### Applications

For Grinding in Mild Steel, SS & other Metals  
 For Fabrication, Constructions,  
 General Engineering & Other Industries

#### Specifications

### 4" GRINDING WHEEL - 796246

Diameter (mm)	100	Thickness (mm)	6	Arbor Hole (mm)	16	Inner Package	25pcs/pack
---------------	-----	----------------	---	-----------------	----	---------------	------------

## New 5" Grinding Wheel - Blue Value Series - 796247



*BLUE VALUE*

### Features

- Long Life
- Competitive Pricing



### Applications

For Grinding in Mild Steel, SS & other Metals  
 For Fabrication, Constructions,  
 General Engineering & Other Industries

### Specifications

#### 5" GRINDING WHEEL - 796247

Diameter (mm)	125	Thickness (mm)	6	Arbor Hole (mm)	22.23	Inner Package	25pcs/pack
---------------	-----	----------------	---	-----------------	-------	---------------	------------

## New 7" Grinding Wheel - Blue Value Series - 796248



*BLUE VALUE*

### Features

- Long Life
- Competitive Pricing



### Applications

For Grinding in Mild Steel, SS & other Metals  
 For Fabrication, Constructions,  
 General Engineering & Other Industries

### Specifications

#### 7" GRINDING WHEEL - 796248

Diameter (mm)	180	Thickness (mm)	6.6	Arbor Hole (mm)	22.23	Inner Package	25pcs/pack
---------------	-----	----------------	-----	-----------------	-------	---------------	------------



### New Economy Range - cut-off wheel - 4" - 796196

#### Features

- High cut rates & provides faster cutting speed .
- High Safety Standard: Tested to strictly comply with En12413
- Fine cutting with less burnt mark and Burr to reduces rework almost Zero. Suitable for MS & Stainless steel Application.



#### Specifications

Cut-off wheel - 796196	Unit
Diameter (mm)	105
Arbor Hole (mm)	16
Thickness (mm)	1.0
Shape	Flat Center
Speci?cation	WA60R-BF
Inner Package	100pcs/pack

### Red Rapid Super Thin 2.4mm Thickness



#### Features

- First time introduction with Red Colour Wheel with 2.4mm Thickness
- Provides minimum material loss, burnt mark, less burr and better surface
- Suitable for cutting Stainless sheet ,metal, angle, pipes, channels & TMT bars cutting, etc.
- Less wastage with high speed cutting



#### Specifications

14" Cut Off Wheel - 796244					
Diameter (mm)	355	Thickness (mm)	2.4	Specification	A46R-BF
Arbor Hole (mm)	25.4	Shape	Flat Center	Inner Package	25pcs/pack



# Disc Grinder G10SN2

PROFESSIONAL



## Specifications

Disc Grinder G10SN2	Unit	G10SN2
Wheel Diameter	mm	100
Power input	w	900
No Load Speed	rpm	10500
Switch Type	-	Slide
Overall Length	mm	266
Overall Height	mm	106
Grip Perimeter	mm	197
No-load Vibration Level	m/s <sup>2</sup>	7.9
No-load Sound Pressure Level	dB(A)	88
Weight (EPTA Standard)	KG	1.8

# Disc Grinder G13SB4

PROFESSIONAL



## Specifications

Disc Grinder G13SB4	Unit	G13SB4
Wheel Diameter	mm	125
Power input	w	1400
No Load Speed	rpm	11500
Tool-less wheel guard	-	provided
Overall Length	mm	288
Weight	KG	2.5



### Specifications

Disc Grinder G18SE4	Unit	G18SE4
Wheel Diameter	mm	180
Power input	w	2400
No Load Speed	rpm	8500
Tool-less wheel guard	-	provided
Overall Length	mm	492
Weight	KG	5.9



### Specifications

Mixer	Unit	UM12VST2	UM16VST2
Capacity: Max Stirrer Diameter	mm	120	160
Power input	w	1200	1600
Tool Spindle Thread	mm	M14	M14
No Load Speed	High	/min	300-650
	Low	/min	150-300
Gear Speed Change	-	2-speed	2-speed
Soft Start	-	Provided	Provided
Overload Protection	-	Provided	Provided
Handle Protection	-	Steel Frame	Steel Frame
Standard Accessory	Stirrer Paddle	-	Ø 120x1pc
	Extension Bar	-	1pc
Weight	KG	5.4	5.6



High Drilling Speed

**DH24PG2**

Compact and Light - Weight

2 Mode

High Drilling Speed



**DH24PH2**

Compact and Light - Weight

3 Mode

### Specifications

Rotary Hammer DH24PG2 & DH24PH2		Unit	
Capacity	Concrete	mm	24
	Steel / Wood	mm	13 / 32
Power input		w	730
No Load Speed		/min	0-1050
Full Load Rate		/min	0-3950
Overall Length		mm	349
Impact Energy	EPTA -Procedure	J	2.7
Drilling Speed		%	80
Vibration Level		m/s <sup>2</sup>	14.5
Weight		KG	2.8



**DH26PB2**

**Compact and  
Light - Weight**

Soft grip handle  
for comfortable operation




**DH26PC2**

**Compact and  
Light - Weight**

Soft grip handle  
for comfortable operation

## Specifications

Rotary Hammer DH26PB2 & DH26PC2		Unit	
Capacity	Concrete	mm	26
	Steel / Wood	mm	13 / 32
Power input		w	830
No Load Speed		/min	0-1100
Full Load Rate		/min	0-4300
Overall Length		mm	349
Impact Energy	EPTA -Procedure	J	2.9
Drilling Speed		%	95
Soft Grip Handle		-	Provided
Soft Grip Side Handle		-	Provided
Vibration Level		m/s <sup>2</sup>	14.3
Weight		KG	2.8

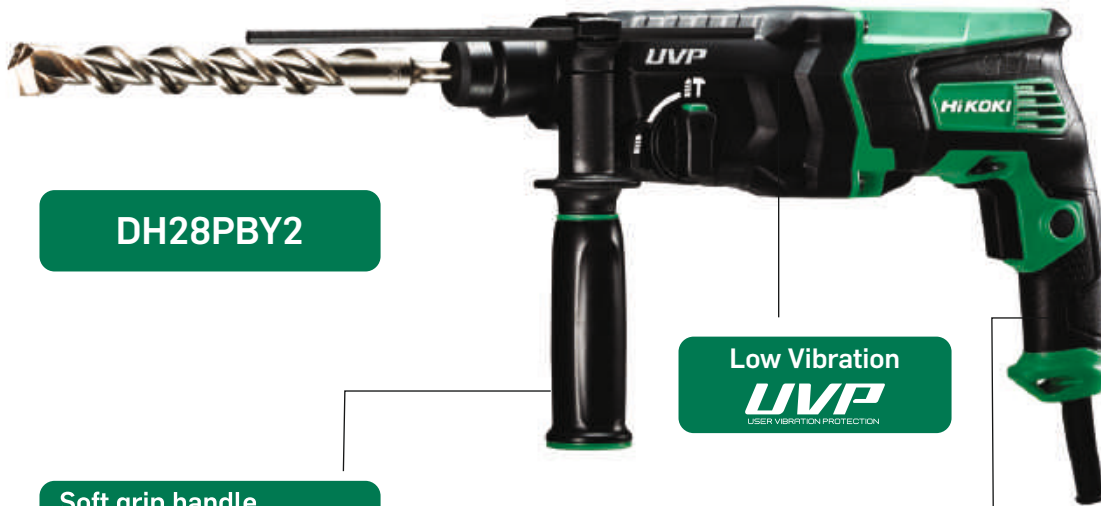


**DH28PBY2**

Compact and  
Light - Weight

2 Mode

Low Vibration  
**UVP**  
USER VIBRATION PROTECTION

Soft grip handle  
for comfortable operation

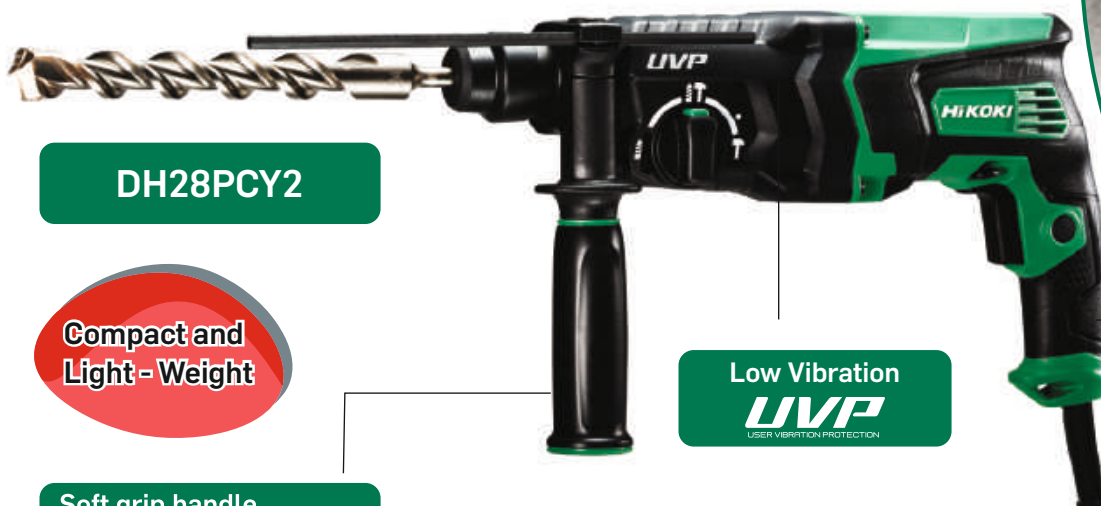

**DH28PCY2**

Compact and  
Light - Weight

3 Mode

Low Vibration  
**UVP**  
USER VIBRATION PROTECTION

Soft grip handle  
for comfortable operation

## Specifications

Rotary Hammer DH28PBY2 & DH28PCY2		Unit	
Capacity	Concrete	mm	28
	Steel / Wood	mm	13 / 32
Power input		w	850
No Load Speed		/min	0-1100
Full Load Rate		/min	0-4300
Overall Length		mm	360
Impact Energy	EPTA -Procedure	J	3.0
Drilling Speed		%	100
Vibration Reduction Mechanism		-	Provided
Soft Grip Handle and Side Handle		-	Provided
Vibration Level		m/s <sup>2</sup>	11.2
Weight		KG	2.96

# Cordless Driver Drill DS 12DA

PROFESSIONAL

## Specifications

Cordless Driver Drill DS 12DA		Unit	
Motor		Brushed	
Chuck	Name	-	10mm Keyless Chuck
	Type	-	Single
	Capacity	mm	0.8-10
Drill Capacity	Steel	mm	10
	Wood	mm	29
Fastening Capacity	Machine Screw	mm	M6
	Wood Screw	mm	29
No-load Speed	High	/min	0-1400
	Low	/min	0-350
Torque	Max	Nm	36
	Hard	Nm	38
	Soft	Nm	15
	Setting	Nm	20 (0.5-5)+Drill
Weight	1.1Kg with BSL1225M Battery		
Standard Accessories	2 Batteries (BSL1225M), Charger (UC125L), Battery Cover, Carrying Case		



# Cordless Impact Driver Drill DV 12DA

PROFESSIONAL

## Specifications

Cordless Impact Driver Drill DV 12DA		Unit	
Motor		Brushed	
Chuck	Name	-	10mm (3/8") Keyless Chuck
	Type	-	Single
	Capacity	mm	0.8-10
Drill Capacity	Steel	mm	10
	Wood	mm	29
	Concrete	mm	8
Fastening Capacity	Wood Screw	mm	5.8x45
No-load Speed	High	/min	0-1,400
	Low	/min	0-350
Impact Rate	High	/min	0-21,000
	Low	/min	0-5,250
Torque	Max	Nm	36
	Hard	Nm	38
	Soft	Nm	15
	Setting	Nm	20+Drill+Impact Drill
Weight	1.1Kg with BSL1225M Battery		
Standard Accessories	2 Batteries (BSL1225M), Charger (UC125L), Battery Cover, Carrying Case		



# Cordless Impact Driver WH 12DA

PROFESSIONAL

## Specifications

Cordless Impact Driver WH 12DA		Unit	
Motor		Brushed	
Capacity	Screws	mm	M4-M8
	Standard bolt	-	M5-M12
	High Strength bolt	-	M5-M10
No-load Speed		/min	0-2,700
Full load Impact rate		/min	0-3,200
Torque	Max	Nm	110
LED job light		-	●
Belt hook	High	-	●
Over Length		-	151
Weight	1.1Kg with BSL1225M Battery		
Battery Type	Li-ion Slide type		
Standard Accessories	2 Batteries (BSL1225M), Charger (UC125L), Battery Cover, Carrying Case		





For any Customer Support / Service  
**Toll Free Number**

**18005725726**

Timings: 10am to 6pm  
Closed on Saturdays / Sundays and Public holidays.

**HIKOKI**  
**UNLEASH the NEXT**

Registered & Head Office

**HIKOKI POWER TOOLS INDIA PVT. LTD.**

Plot No.9A, 1st Phase, Peenya Industrial Area, Peenya  
Bangalore – 560 058, India  
Tel: (080) 4117 0777/4117 0778, Fax: 41127 1222

Email: [ho.mktg@hikoki-powertools.in](mailto:ho.mktg@hikoki-powertools.in) | [www.hikoki-powertools.in](http://www.hikoki-powertools.in)  
(Formerly known as Hitachi Koki India Private Limited)

Head Quarters

**Koki Holdings Co., Ltd.**

Shinagawa Intercity Tower A, 20th Floor, 15-1  
Konan 2-Chrome, Minato-ku, Tokyo 108-6020, Japan.  
Tel: 81-3-5783-0601, Fax: 81-3-5783-0709

**Branches**

Ahmedabad	: 079 - 2685 8008
Bengaluru	: 080 - 4117 0777
Chennai	: 044 - 2432 8681 / 2435 0111
Cochin	: +91 - 95677 61040
Delhi	: 011 - 4752 8944
Hyderabad	: 040 - 4013 8207
Jaipur	: +91 - 88240 99593
Bhubaneshwar	: +91 - 9830200254
Kolkata	: 033 - 2479 7542
Lucknow	: +91 - 9026753265
Ludhiana	: +91 - 7625001099
Mumbai	: 022 - 2775 8814
Pune	: +91 - 97027 86342
Guwahati	: +91 - 98360 92333